


Installation Tool and Accessories

Wirecon®
Self-Contained Devices

Performance, speed and safety were the driving forces behind the redesign of the Wirecon installation tool. Having the ability to install multiple conductors into the self-contained device quickly and accurately was the focus of our design. Now the installer can position the conductors over the insulation-displacement contacts and quickly terminate the conductors.

Wirecon Self-Contained Devices are designed to meet the increasing industry demand for correct and faster installation. Wirecon's SCD's are self-contained, completely insulated and DO NOT require a separate outlet box.

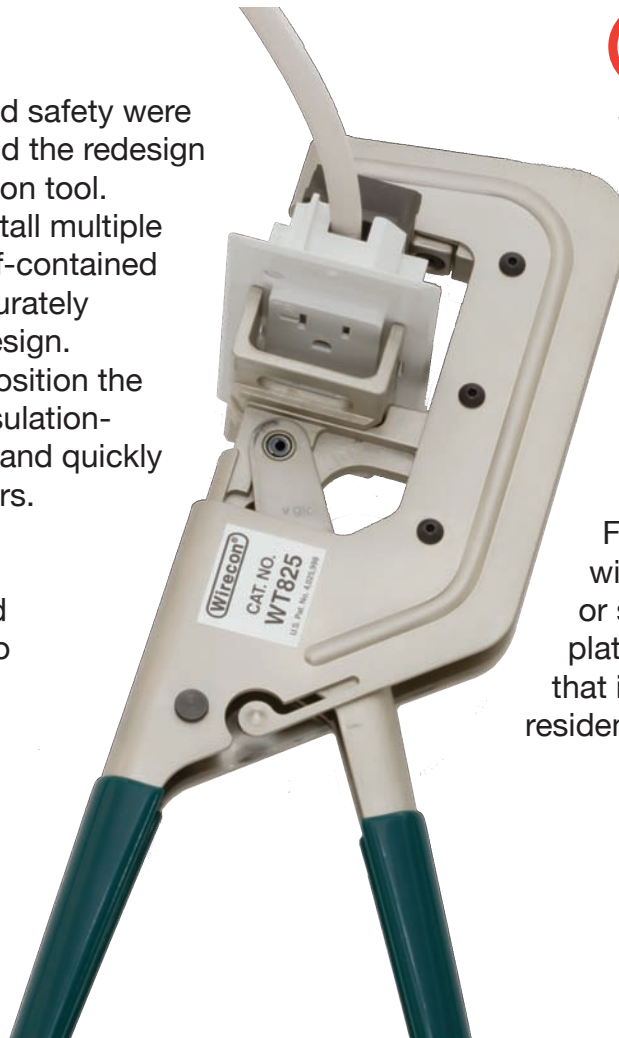

Devices secure to the wall surface with two self-ranging pawls and are ideal for factory built and transit applications where vibration-resistance is especially important.

Finish off SCD installations with Wirecon's Snap-On or standard Screw-On wall plates for a decorative appeal that is identical to conventional residential devices.

Tools and Accessories

Description	Catalog Numbers
Installation tool, complete with wire installation pushers.	WT825
Replacement kit with Handle – Tool Links, Pins Washers and Screws necessary to recondition any WT820, WT823, WT824 or WT825 Installation Tool.	WT825RHK
Replacement Wire Pusher – Receptacle.	WT829
Replacement Wire Pusher – Switch.	WT827
Replacement Device Cradle.	WT828



WT829



WT827



WT825RHK

Self-Contained Devices

Receptacles



Fashion Series

Conventional

	15A Duplex	15A Single	20A Duplex	20A Single	15A Duplex
Color	15A Duplex	15A Single	20A Duplex	20A Single	15A Duplex
Brown	WDRDU15BR	WDRDU15BRS	WDRDU20BR	WDRDU20BRS	WDRU15BR
Ivory	WDRDU15IV	WDRDU15IVS	WDRDU20IV	WDRDU20IVS	WDRU15IV
White	WDRDU15WT	WDRDU15WTS	WDRDU20WT	WDRDU20WTS	WDRU15WT
Black	WDRDU15BKSPFW	WDRDU15LAS			
Light Almond	WDRDU15LA				

Tamper Resistant Receptacles



Fashion Series

Conventional

	15A Duplex	15A Single	20A Duplex	15A Duplex
Color	15A Duplex	15A Single	20A Duplex	15A Duplex
Brown	WRD15	WRD151	WRD20	WR15
Ivory	WRD15I	WRD151I	WRD20I	WR15I
White	WRD15W	WRD151W	WRD20W	WR15W
Light Almond	WRD15LA	WRD151LA	—	—

Switches




Fashion Series

Conventional

	15A, 120 Volt, Single-Pole Single Gang	15A, 120 Volt, Single-Pole Gangable	15A, 120 Volt, Three-Way Gangable	15A, 120 Volt, Single Gang	15A, 120 Volt, Gangable	15A, 120 Volt, Three-Way Gangable
Color	15A, 120 Volt, Single-Pole Single Gang	15A, 120 Volt, Single-Pole Gangable	15A, 120 Volt, Three-Way Gangable	15A, 120 Volt, Single Gang	15A, 120 Volt, Gangable	15A, 120 Volt, Three-Way Gangable
White	WDSDU151WT	WDSDU151WTG	WDSDU153WTG	WDSU151WT	WDSU151WTG	WDSU153WTG
Light Almond	—	WDSDU151LAG	—	—	—	—

Dimensions and Specifications

Self-contained wiring devices for use with #14 or #12 AWG wire-copper NM or NMB cable only.

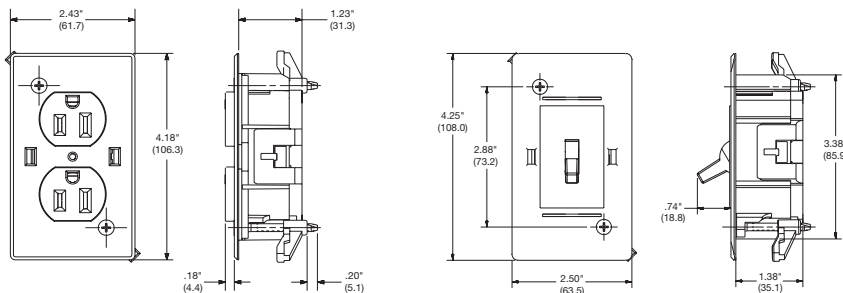

FEATURES

- Quick, one-way assembly
- Impact-resistance thermoplastic
- Vibration-resistant IDC terminations (4 per contact)
- Accepts up to 3 layers of either #14 or #12 NM cables
- UL listed UL498
- CSA 22.2 Certified
- UV resistant



HUBBELL INCORPORATED (Delaware)
 185 Plains Road • Milford, CT 06461-2420 • (800) 323-2792 • Fax: (800) 543-0538
www.bryant-electric.com

Wiring Systems

WSS100